



Drop-in anchor with internal thread for heavy loads

INDEX

HE-HC

Short. Zinc-plated. ETA Assessed for non-structural applications



Assessments:



Material for use:

SOLID



Hollow-core slab



Concrete



Reinforced concrete



Stone


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

	CODE	DIMENSIONS			EAN	PRICE
	HEHCM08	M8 x 25	100 pcs.	1600 pcs.	8423533841216	28,132
	HEHCM10	M10 x 25	50 pcs.	800 pcs.	8423533841223	45,821
	HEHCM12	M12 x 25	50 pcs.	800 pcs.	8423533841230	84,237

TECHNICAL INFORMATION

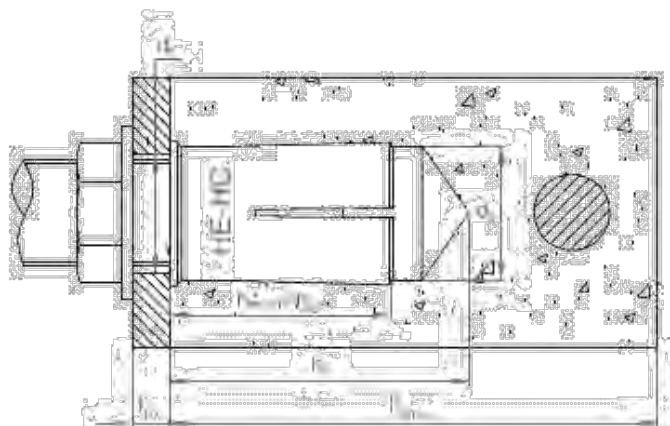

CODE	DIMENSIONS	Drill	Ø element to fix	Hole depth min.	Base material thickness	Min. anchor depth	Effective depth	Torque	Min. distance to edge	Min. distance from axis	Tension load non-cracked concrete	Shear load non-cracked concrete
------	------------	-------	------------------	-----------------	-------------------------	-------------------	-----------------	--------	-----------------------	-------------------------	-----------------------------------	---------------------------------

HEHCM08	M8 x 25	10	9	28	80	25	25	11	60	120	101	101
HEHCM10	M10 x 25	12	12	28	80	25	25	17	60	120	162	162
HEHCM12	M12 x 25	15	14	29	80	25	25	38	60	120	162	162

CHARACTERISTICS




Zinc-plated




Heavy loads




RECOMMENDED FOR




Air conditioning




Ceiling anchor




Beach handrails



Tent/Marquee



Industrial shelving



Streetlight



Balcony handrail



Wooden guardrail

TECHNICAL DOCUMENTATION



CERT_EOTA

<https://www.indexfix.com/docs/eta-heho-6-en.pdf>



DOP

<https://www.indexfix.com/docs/dop-he-en.pdf>



OTRAS_HOMS

<https://www.indexfix.com/docs/vds-rev1.pdf>